



BASIC STRIP

Installation Instructions J-Box Mounting

- Attach round mounting plate with nipple in center to J-box. Connect wires and push connections through large hole into J-box.
- Place fixture over J-box and attach to nipple through center hole using flat head phillips screw provided.
- The mounting hole for J-box installation is centered on the fixture.

When installing mounting plate, align holes parallel to direction fixture will be hanging.




J-Box Mounting Plate





BASIC STRIP 36 - mounted to J-box with mounting plate.

J-box mounting hole




BASIC STRIP
back view

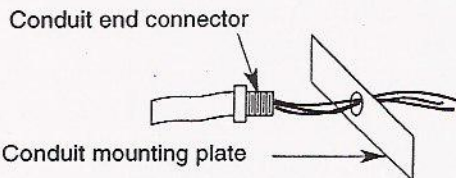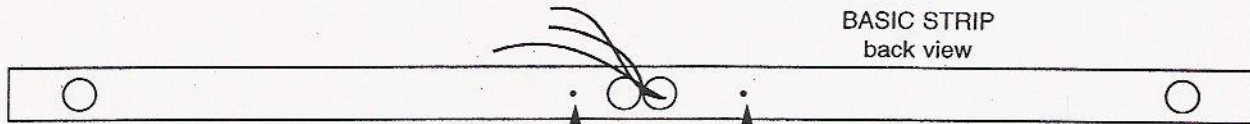


Conduit mounting plate

Conduit mounting plate
screw holes



Conduit mounting plate

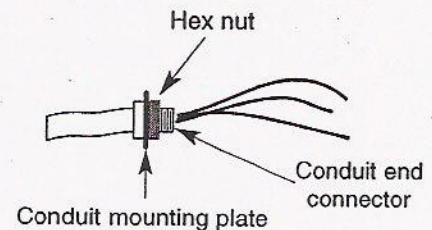

Conduit mounting plate

Installation Instructions Direct-to-wall

- Thread conduit end connector (customer supplied) and wires through center hole in conduit mounting plate. Secure with hex nut (customer supplied.)
- Connect wires from fixture to corresponding wires from conduit. Push connections back inside fixture.
- Secure conduit mounting plate to fixture using the screws provided.
- Mount fixture to wall with screws (customer supplied) using holes located on either end of fixture.
- The holes for direct-to-wall mounting are located 2-3/8" from each end of the fixture.