


# DUPLA CURVED

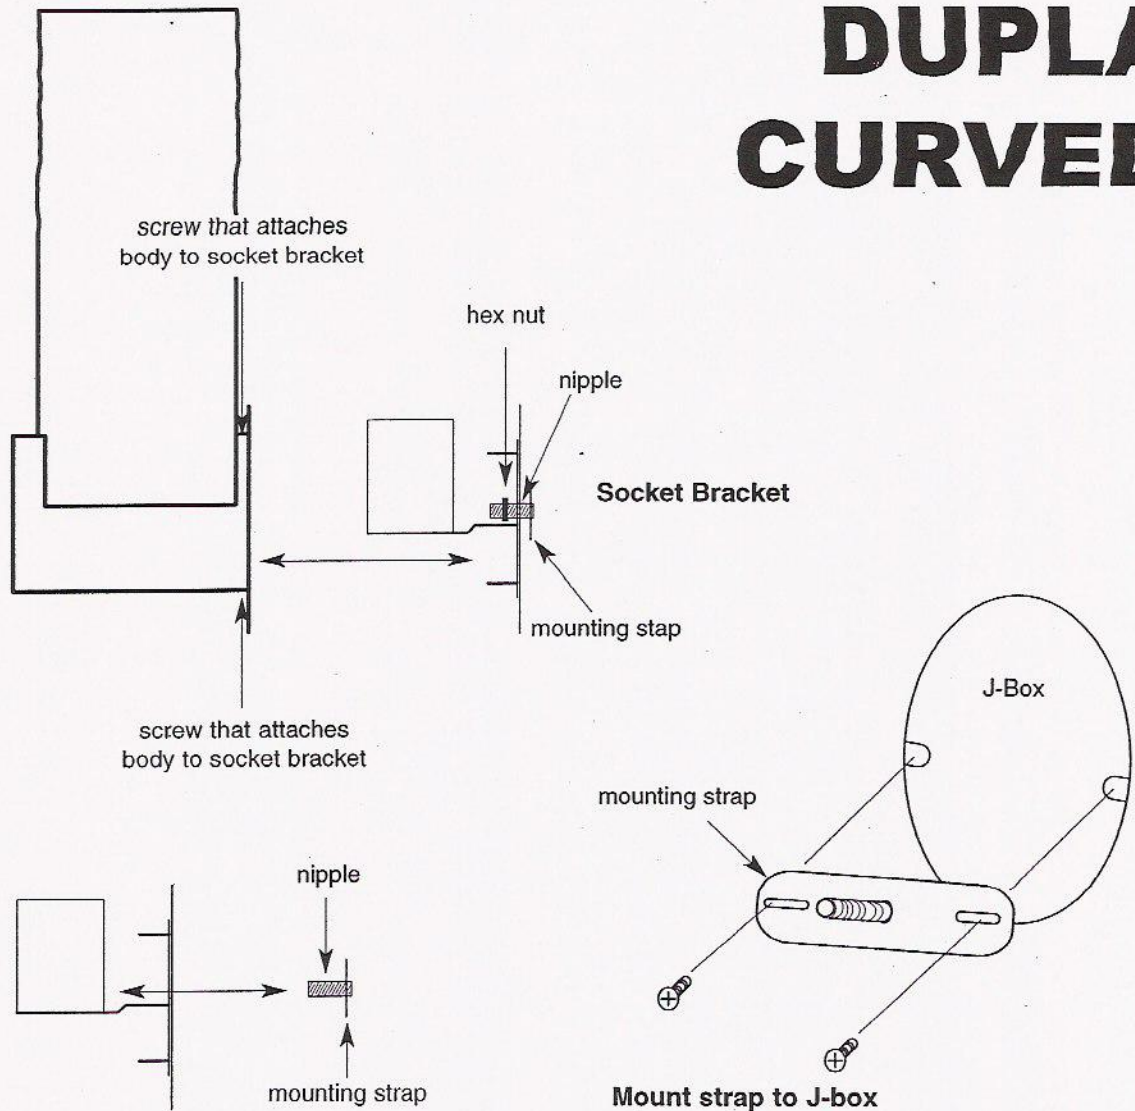

## Mounting Instructions

1. Loosen screws on top and bottom of fixture to remove socket bracket from body of fixture.
2. Unscrew hex nut to remove mounting strap and nipple from socket bracket.
3. Mount strap with nipple attached to J-box.
4. Connect wires from socket bracket to corresponding wires from J-box. Connect ground wire to green screw on mounting strap.
5. Attach socket bracket to mounting strap and nipple by threading the nipple back through the center hole and securing with the hex nut.
6. Re-attach the body of the fixture to the socket bracket.