

4411-30.

CEILING
FIXTURES

® THE ORIGINAL

4410-30.



Fluorescent version shown.

To comply with UL standards, for halogen lamping only, additional white canopies are attached to the back of the fixture which increases the extension from the ceiling by up to 1 1/2".



Sandwich
Design by Proli Diffusion Studio.




4410-30 / 4411-30.


Satin nickel metal finish.
Optical glass diffuser.
4410-30-HAL: 1 x T-3 RSC 4 11/16" 120V 100W Max.
4410-30-CFE: 2 x G24Q1 120V 13W. Electronic ballast.
4411-30-HAL: 1 x T-3 RSC 4 11/16" 120V 150W Max.
4411-30-CFE: 2 x G24Q1 120V 13W. Electronic ballast.




4410-30.



4411-30.



EXT. - Extension HAL: 4 3/4" - CF: 3 1/4"

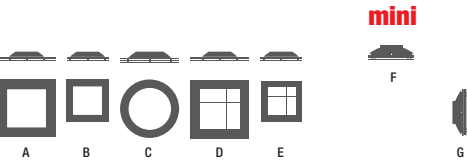

SANDWICH. Family
Pages: **A**-148. **B**-148. **C**-150. **D**-152. **E**-152. **F**-149-151-153. **G**-196.

mini

6 1/4"



® THE ORIGINAL


8604-30.




Mini Sandwich
Design by Proli Diffusion Studio.



8604-30.
Satin stainless steel.
Opal glass diffuser.
1 x T-4 GY6.35 120V 50W Max.



CEILING
FIXTURES

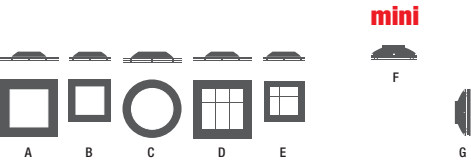

SANDWICH. Family
Pages: **A**-148. **B**-148. **C**-150. **D**-152. **E**-152. **F**-149-151-153. **G**-196.