


# Talis™ S ThermoBalance II Deck Valve

06453XX0

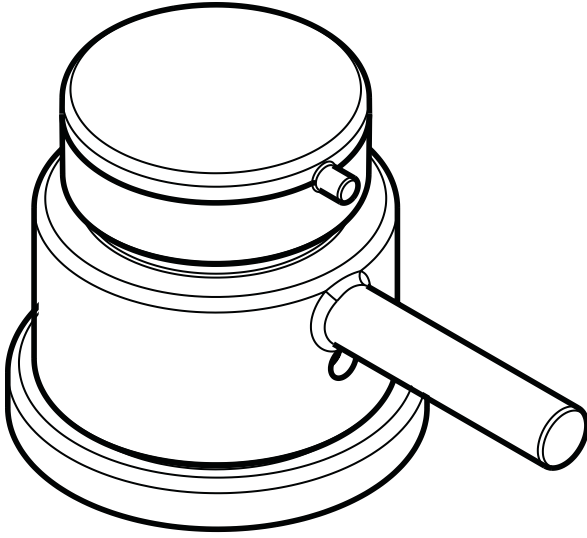


## Product Features

- Thermostatic temperature control, 2-way diverter, and volume control in one unit
- Single hole installation
- Includes both rough and trim
- High temperature limit stop may be reset to comply with local plumbing codes
- Max. flow rate 8 gpm @ 44 psi

## Code Compliance

This unit meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- Listed by IAPMO
- Approved for use in Massachusetts

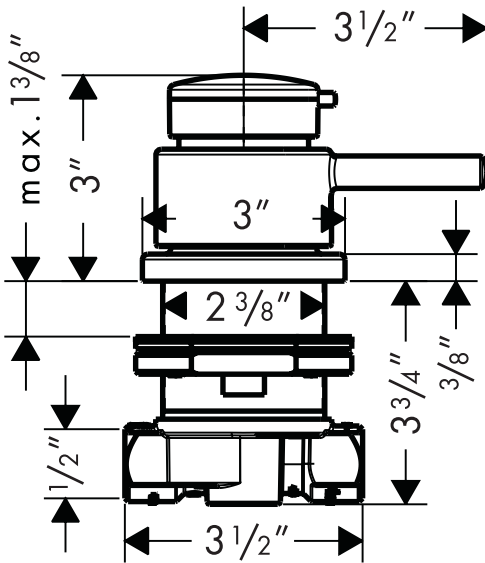

## Available Finishes

|                |          |
|----------------|----------|
| Chrome         | 06453000 |
| Brushed Nickel | 06453820 |

## Optional Accessories

|                                    |          |
|------------------------------------|----------|
| Tub spout and rough                | 06404XX0 |
| Metal hose pull-out set            | 06438XX0 |
| Handshower – many styles available |          |

The measurements shown are for reference only.

Products and specifications shown are subject to change without notice.

Specification sheet revised 7/2008

**hansgrohe**