


**MODEL R4VI-R**

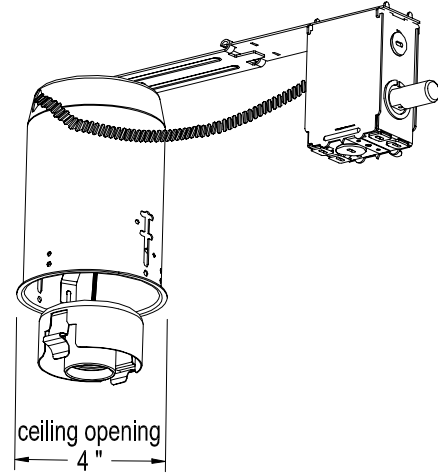

**Ordering information**

R4VI	-	B	-	R	-	ICA
Series		Housing Type		Installation Type		Options
<b>R4VI</b> Recessed 4 inch Vertical Incandescent		B - Boxed Blank – Frame-In Kit or Remodel		R - Remodel Housing Blank – New Construction		ICA - Insulation Contact & Air Tight

**Product Features**

**Application:** Remodeling housing, requires 3" minimum clearance from insulation

**J Box:** Supplied with four standard knockouts and four integral Romex® clamps. Spring loaded door, for easy access to wiring. Approved for through branch wiring.

**Mounting:** Housing mounts to ceilings up to 1" thick with pressure spring clips. Clips allow easy removal of housing.




**Material:** 20 gauge galvanized steel with ceramic/nickel-plated socket.

**Listing**

UL & CUL listed. Suitable for damp locations.

W.A.C. reserves the right to change details that do not affect overall function and performance.



<p>R4VT-21-□□                  Finishes: BN, SBK, SC,                  SG, WT                  Lamp: PAR16 45W                  PAR20 50W</p>		<p>R4VT-22-□□                  Finishes: BK, WT                  Lamp: PAR20 50W                  R20 75W                  PAR16 50W</p>		<p>R4VT-23-□□                  Finishes: WT                  Lamp: PAR16 45W,                  PAR20 50W</p>	
---	---	--	--	--	---

Finish Key: BN-Brushed Nickel, BK-Black, SBK-Specular Black, SC-Specular Clear, SG-Specular Gold, WT-White  
 All trims are white, finish choices refer to baffle or reflector color.

