

COMMANDER®

Widespread Gooseneck Lavatory Combinations

SC-3004-LD



SC-3006-LD



GENERAL SPECIFICATION

Polished chrome plated Commander widespread gooseneck lavatory faucet with 1/4 turn ceramic cartridges covered by a 25-year warranty. 8" fixed centers with rigid copper tee connection. Accommodates installations up to 1 1/2" thick. Widespread faucet with 5-1/4" deep spread gooseneck spout. Vandal-resistant water conserving flow control reduces flow to 2.2 gpm/8.4 lpm. Meets ASME A112.18.1/CSA B125.1 and NSF61.

4" Wrist Blade Handle Models

Vandal-resistant 4" wrist blade handles with color-coded indexes.

- ☐ **SC-3004** Strainer drain
- ☐ **SC-3004-LD** No drain assembly
- ☐ **SC-3014** Solid brass 1-1/4" pop-up drain

6" Wrist Blade Handle Models

Vandal-resistant 6" wrist blade handles with color-coded indexes.

- ☐ **SC-3006** Strainer drain
- ☐ **SC-3006-LD** No drain assembly
- ☐ **SC-3016** Solid brass 1-1/4" pop-up drain

OPTIONS

SUFFIX	DESCRIPTION
☐ BO	0.5 gpm flow control, vandal-resistant
☐ CA**	Low lead for CA AB1953 compliance
☐ CWO	Cold water only
☐ D75	Diamond 75 escutcheons
☐ FC*	2.0 gpm laminar flow control, plain end spout
☐ FH	Flex hose (3/8" x 3/8" compression)
☐ GB	1.5 gpm flow control, vandal-resistant
☐ HS	Hose and spray attachment
☐ LD	Less drain assembly (SC-3014 & SC-3016 only)
☐ LF	2.2 gpm laminar flow control outlet
☐ MI	Metal index for handles
☐ SO	Rose spray outlet
☐ 4*	3-3/4" deep spread gooseneck spout, rigid or swivel
☐ 8*	8" deep spread gooseneck spout, rigid or swivel
☐ 9*	9" deep tubular swing spout, rigid or swivel
☐ 12*	12" deep tubular swing spout, rigid or swivel
☐ TWI	Tee for connection to pedal valves and widespread valve bodies
☐ VB6*	6" deep rigid vacuum breaker spout
☐ VB8*	8" deep rigid vacuum breaker spout

VACUUM BREAKER OPTIONS

SUFFIX	DESCRIPTION
☐ ST	Serrated tip
☐ SW	Swivel spout

* See page 105 for optional spout specifications



** The following options are not available with the "CA" option: HS (Hose & Spray), SO, TWI, VB6, VB8, ST, SW, & TMV.

This space for Architect/Engineer approval.





Rough-Ins

SC-3004-LD

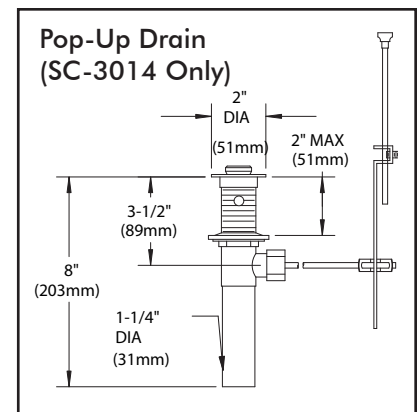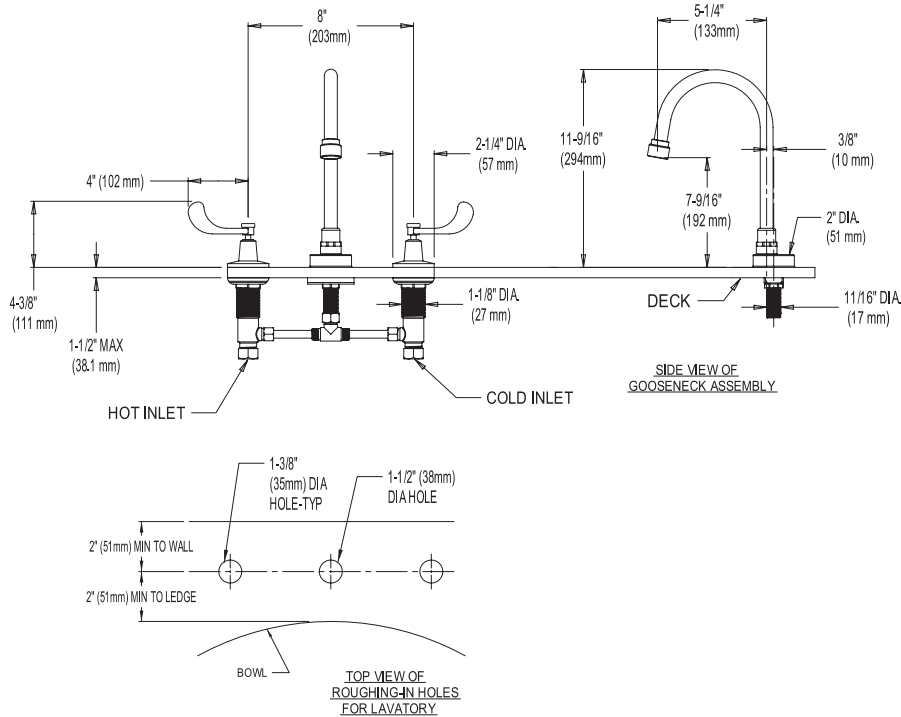

SC-3006-LD

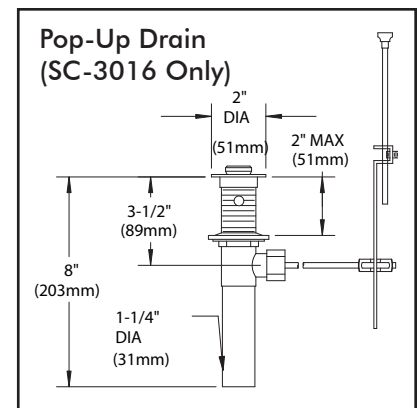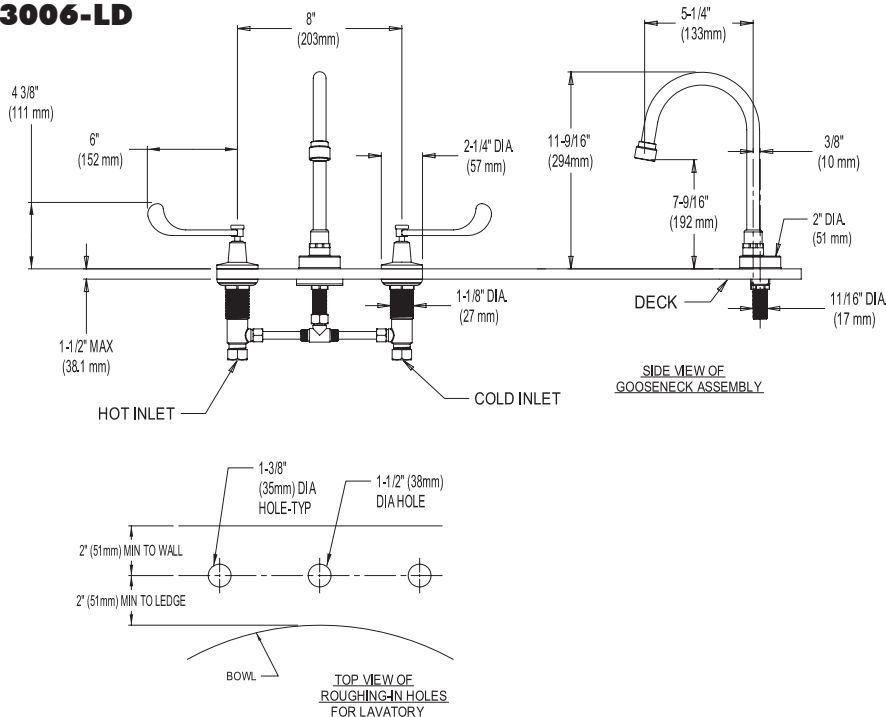

NOTE: All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. Lavatory inlets are sized for either coupling or sweat connections. Unless otherwise specified, all inlets are 1/2" NPSM.